

CERTIFICATE G59/3

Product Model: Growatt SPH3000/ Growatt SPH3600/ Growatt SPH4000/
Growatt SPH4600/ Growatt SPH5000/ Growatt SPH6000/

Nominal AC Power: 3000W/3680W/4000W/4600W/4999W/6000W/
MAX. AC Power: 3000W/3680W/4000W/4600W/4999W/6000W/

Manufacturer: Growatt New Energy Technology Co., Ltd.

Address: 1st East & 3rd Floor, Jiayu Industrial Zone, Xibianling, Shangwu Village, Shiyan, Baoan District, Shenzhen, P.R. China

Test Lab: Growatt R&D Test Lab

SSEG manufacturer/supplier declaration:


I certify on behalf of the company named above as a supplier of a Generating unit, that all products supplied by the company with the above Type Test reference number will be manufactured and tested to ensure that they perform as stated in this document, prior to shipment to site and that no site modifications are required to ensure that the product meets all the requirements of G59/3.

Test Details:

- Under / Over voltage switch off
- Under / Over frequency switch off
- Loss of mains test
- Power quality: Harmonic current emissions as per BS EN 61000-3-2
- Power quality: Power factor
- Power quality: Voltage fluctuations and flicker as per BS EN 61000-3-3
- Power quality: DC injection

Growatt New Energy Technology CO., LTD

The General Engineer

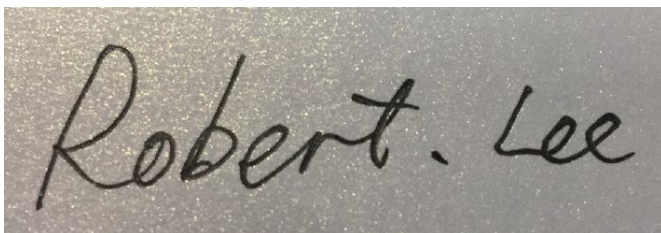

GROWATT NEW ENERGY TECHNOLOGY CO.,LTD
Building B, Jiayu Industrial Zone, #28 Guanghui Road,
Longteng Community, Shiyan, Baoan District,
Shenzhen, P.R. China

T + 86 755 2951 5888
F + 86 755 2747 2131
P.C. 518000

E info@ginverter.com
W www.growatt.com
W www.ginverter.com

TEST I: UNDER/OVER VOLTAGE TEST						
Function	Setting		Trip test		"No trip tests"	
	Voltage	Time delay	Voltage	Time delay	Voltage /time	Confirm no trip
U/V stage 1	200.1V	2.5s	199.4V	2.57s	204.1V 3.5s	No Trip
U/V stage 2	184V	0.5s	182.5V	0.57s	188V 2.48s	No Trip
					180V 0.48s	No Trip
O/V stage 1	262.2V	1.0s	262.4V	1.08s	258.2V 2.0s	No Trip
O/V stage 2	273.7V	0.5s	274.5V	0.58s	269.7V 0.98s	No Trip
					277.7V 0.48s	No Trip

Note for Voltage tests the Voltage required to trip is the setting $\pm 3.45V$. The time delay can be measured at a larger deviation than the minimum required to operate the protection. The No trip tests need to be carried out at the setting $\pm 4V$ and for the relevant times as shown in the table above to ensure that the protection will not trip in error.

TEST II: UNDER/OVER FREQUENCY TEST						
Function	Setting		Trip test		"No trip tests"	
	Frequency	Time delay	Frequency	Time delay	Frequency /time	Confirm no trip
U/F stage 1	47.5Hz	20s	47.48Hz	20.06s	47.7Hz 25s	No Trip
U/F stage 2	47Hz	0.5s	46.98Hz	0.55s	47.2Hz 19.98s	No Trip
					46.8Hz 0.48s	No Trip
O/F stage 1	51.5Hz	90s	51.52Hz	91.2s	51.3Hz 95s	No Trip
O/F stage 2	52Hz	0.5s	52.00Hz	0.59s	51.8Hz 89.98s	No Trip
					52.2Hz 0.48s	No Trip

TEST III: LOSS OF MAINS PROTECTION				
Parameter	10% of power	55% of power	100% of power	Note
G59/3 Limit	0.5s	0.5s	0.5s	
Trip setting,sec	-	-	-	
Trip value,sec	0.271S	0.268S	0.217S	

TEST IV: POWER QUALITY TEST-HARMONICS								
Parameter	2nd	3rd	5th	7th	9th	11th	13th	15th....39th
G59/3 Limit(A)	1.08	2.3	1.14	0.77	0.4	0.33	0.21	0.15x(15/n)
Test value	0.086	0.266	0.0338	0.0264	0.0435	0.0158	0.0297	<limit BS EN 61000-3-2

TEST V: POWER QUALITY TEST-POWER FACTOR				
Parameter	212V	230V	250V	Note
G59/3 Limit	0.95lag-0.95lead	0.95lag-0.95lead	0.95lag-0.95lead	
Measured	0.995	0.995	0.994	@full load

TEST VI: POWER QUALITY TEST- VOLTAGE FLICKER					
Parameter	Starting	Stopping	Running		Note
G59/3 Limit	4%	4%	P _{st} =1.0	P _{it} = 0.65	
Test Value	<1.08%	<1.08	0.27	0.17	

TEST VII: POWER QUALITY TEST- DC INJECTION				
Test level	10% power	55% power	100% power	Note
Recorded value	30.2mA	25mA	56mA	
as % of rated AC current	0.12%	0.09%	0.21%	
Limit	0.25%	0.25%	0.25%	

TEST VIII: RECONNECTION TIMES					
Time delay setting	Measured delay	Checks on no reconnection when voltage or frequency is brought to just outside stage 1 limits of table 1			
65S	69.4S	At 266.2V	At 196.1V	At 47.4Hz	At 51.6Hz
Confirmation that the Generating Unit does not re-connect		No reconnection	No reconnection	No reconnection	No reconnection